



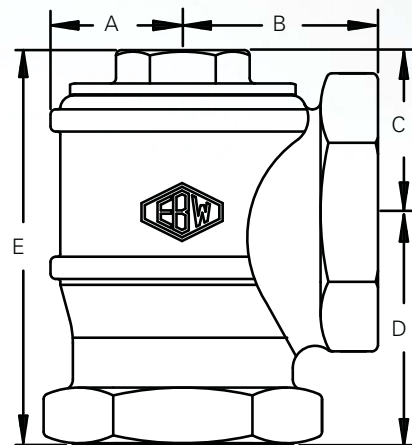

615 AND 635 ANGLE CHECK VALVES

Angle check valves are used on suction system fuel lines to maintain prime. EBW angle check valves are installed at the top of an underground storage tank suction line. Single poppet models are typically used where access to the valve is readily available.

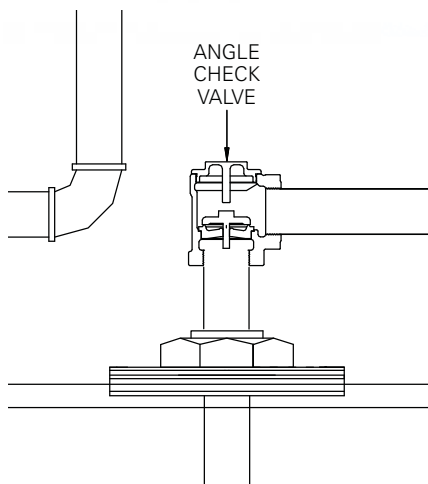

Materials

- Body: zinc-plated cast iron.
- Seat: brass.
- Poppet: brass.
- NPT: brass.
- Spring: stainless steel.

Model	A		B		C		D		E	
	In	mm	In	mm	In	mm	In	mm	In	mm
61530101	1.50	38.10	2.19	55.60	1.82	46.20	2.62	66.50	44.40	112.80
63520101	1.81	45.90	2.69	68.30	2.43	61.70	2.66	67.60	5.09	129.30

*Spring loaded.

Model	Size		Poppet Type	Weight	
	In	mm		Lbs	Kg
61530101	1.50	38.1	Single	3.80	1.70
61530201*	1.50	38.1	Single	3.90	1.80
63520101	2.00	51	Single	7.25	3.30

*Spring loaded.

