

PRO20-012


Get more done in less time with the powerful PRO20-012

- Standard model is ready for extreme temperatures, tested to -40°
- 40 amp circuit breaker motor protection
- Field replaceable switch and vanes
- Factory-installed power cord

PRO20-012 SPECIFICATIONS

Flow Rate	20 GPM (76 L/min)
Voltage	12V (dc)
Type	Carbon Vane
Duty Cycle (On / Off)	30 min. / 30 min.
Power Cord	18 ft. (5.5 m) x 10/2 AWG

Inlet / Outlet Size	1 in. / 1 in. NPT
Dispensing Hose	18 ft. (5.5 m) x 1 in.
Suction Pipe	Metal, 1 in. NPT, adjustable to 40 in. (101.6 cm)
Nozzle Holder	Lockable
Warranty	4 Year

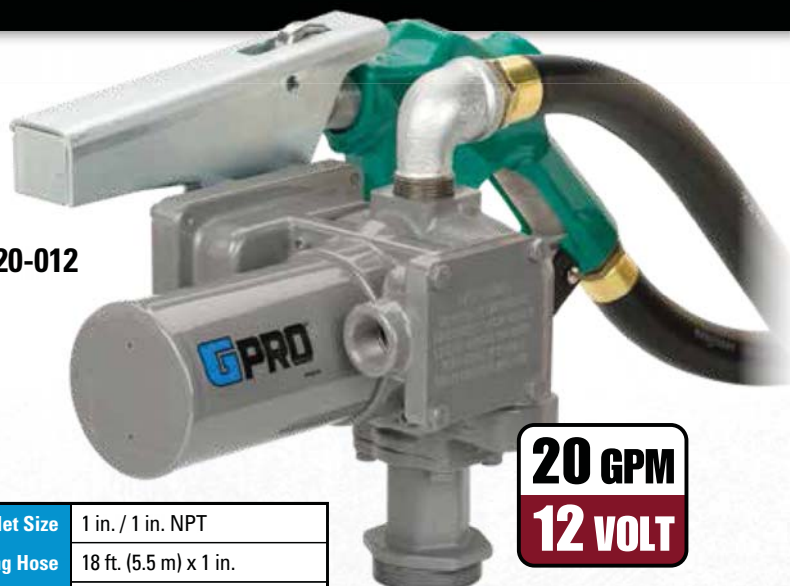

20 GPM
12 VOLT



4 YEAR
PUMP
WARRANTY

ORDERING INFORMATION

Model	Part No.	Nozzle	Hose	Suction Pipe	Temperature Rating	Meter
PRO20-012AD	501000-03	Automatic Diesel	18 ft.	Metal	-20° F / -29° C	None
PRO20-012MD	501000-02	Manual Diesel	18 ft.	Metal	-20° F / -29° C	None
PRO20-012PO	501000-01	None	None	None	Tested to -40° F / -40° C	None

FOR USE WITH gasoline, diesel fuel and kerosene. Refer to Owner's Manual for full list of fuels.