

## Test Boots

FlexWorks Test Boots are used to isolate and air-test the interstitial space between the primary and secondary pipe. One test boot is required for each pipe end.



Models TBA-3015,  
TBA-3020, TBA-4015 and TBA-4020



Models TBA-0075,  
TBA-0100, TBA-0150, TBA-0200 and TBA-0300




Test Gauge Assembly (TGA-15)



Test Jumper for Air Stems  
(TJ-200A)



Test Line Termination Kit for Air Stems  
(TLT-36A)

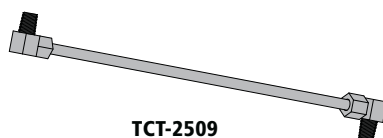

TCT-2509



TTT-2536

## Ordering Specifications - Test Boot & Testing Equipment

Model #	Application	Weight	
		lbs.	kg
TBA-0075	3/4" Test Boot with Air Stem	0.20	0.09
TBA-0100	1" Test Boot with Air Stem	0.20	0.09
TBA-0150	1.5" Test Boot with Air Stem	0.35	0.16
TBA-0200	2" Test Boot with Air Stem	0.40	0.18
TBA-0300	3" Test Boot with Air Stem	0.70	0.32
TBA-3015	3" to 1.5" Test Boot with Air Stem	0.35	0.16
TBA-3020	3" to 2" FRP Test Boot with Air Stem	0.40	1.18
TBA-4015	4" to 1.5" Test Boot with Air Stem	0.75	0.34
TBA-4020	4" to 2" Test Boot with Air Stem	0.75	0.34
TBA-4030	4" to 3" FRP Test Boot with Air Stem	0.70	0.32
TJ-200A	Test Jumper for Air Stems		
TLT-36A	Test Line Termination Kit for Air Stems		
TGA-15	Test Gauge Assembly		
TCT-2509	Test Jumper for Double-Wall Coupling (DPC and SBC Series)		
TTT-2536	Test Tube Termination Kit for Double-Wall Coupling (DPC and SBC Series)		